

MaxFlo® XL



EXPERT LINE

YEARS OF WARRANTY



As defined by EN 17645.
Go to report pages to see
the complete detail by item.



MAKES LIFE EASIER


- Optimised design and hydraulics
- Twist-lock opening cover for easy maintenance




Easy-to-service
Design provides simple
installation



See-through strainer
cover



Drain plugs for an easy
wintering

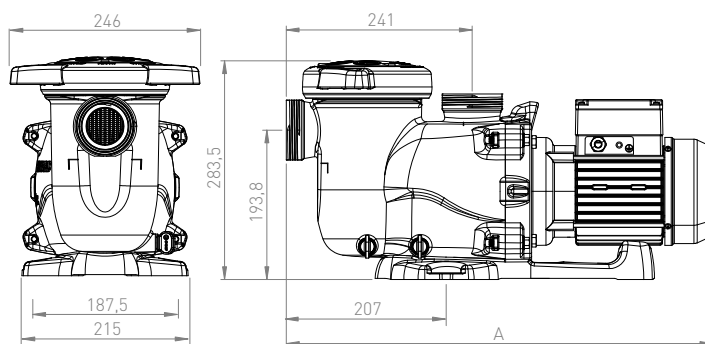

Pressure (mbar)

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IPX5, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC
Prefilter size	1.5 L

Flow rate (m³/h)

	Type HP	Dim. A (mm)	Weight (kg)	Fittings** ø (mm)	Flow rate*	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor P2 (W)	Amps at P1 Max (A)	Quantity per pallet	Item
SINGLE PHASE MAXFLO® XL	1/2	554	11.3	50	10.2 m³/h	568	550	2.7	24	SP2305XE081E2
	3/4	554	11.3	50	11.5 m³/h	629	550	3.0	24	SP2307XE111E2
	1	554	12.6	50	14.3 m³/h	741	790	3.3	24	SP2310XE161E2
	1.5	554	12.6	50 and 63	16.4 m³/h	864	790	3.8	24	SP2315XE221E2
THREE PHASE MAXFLO® XL	3/4	554	11.2	50	11.7 m³/h	604	550	2.5 / 1.4	24	SP2307XE113E2
	1	554	11.6	50	14.0 m³/h	718	550	2.7 / 1.5	24	SP2310XE163E2
	1.5	585	15.1	50 and 63	16.7 m³/h	821	750	2.9 / 1.6	24	SP2315XE223E3

* At 8 m water column.

** Inlet /outlet port size 1-1/2". Possibility of having a set of two ANSI quick connect unions (SP2700UNKIT) 1"-1/2".